


Inside or Ceiling Mount & Valance (cont'd)

Step 4: Install the track underneath the valance. NOW tighten the screws to secure the track.

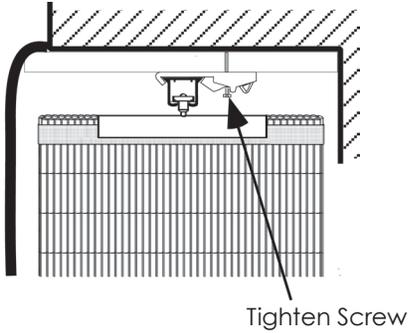

IM INSTALL IS NOW COMPLETE.

Inside or Ceiling Mount Without Valance

Follow steps 2 through 4 for Inside Mount with valance, mounting your IM bracket into the top of the window/soffit or ceiling.

IM INSTALL IS NOW COMPLETE.

End Stop Installation (Optional)

Your Averté Natural Fold™ is designed to open both ways. IF one way only operation is preferred follow the steps below:


Step 1: When sliding the round carrier wheels into the track, slide an End Stop between the first and second carrier wheel.



Step 2: Slide the first carrier and the End Stop all the way to the end of the track and then tighten the end stop in place so that the first carrier wheel does not slide.

Splicing Rails (Optional)

A Splice can be used with ceiling or wall mount applications and with all types of brackets. Prepare the two pieces of track face up on a flat surface, slide each track into the splice until they meet in the center of the splice to form a single track. Make sure that there are mounting brackets close to the splice (2"- 4" on each side). This splice is NOT a bracket.

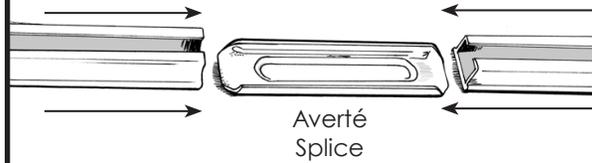

Limited Lifetime Guarantee

Horizons Window Fashions warrants that its Horizons products - properly installed in a residential dwelling will be free from defects in materials and workmanship for as long as the original purchaser owns the product.

All fabric colors tend to lose their original intensity over time, and pull cords eventually wear out. This is considered normal wear and tear and is not covered by this guarantee. Abuse and misuse are not covered. Color lots vary and may not exactly match a previously ordered product. Repair is the purchaser's sole remedy under this guarantee.

This guarantee does not cover incidental or consequential damages, freight, installation or service calls (trip charges).

Horizons® Window Fashions
www.horizonshades.com
06/2016

Installation Instructions for



Averté Natural Fold




Congratulations on the purchase of your new Horizons® Averté Natural Fold




Outside Mount


Step 1: Firmly attach the OM brackets to the wall. The two end brackets should be within 3" of the end of the track. Space any additional brackets evenly. Care should be taken to ensure all brackets are level.



Step 2: Attach an end cap on one end of the track. Install the track into the brackets and tighten the screw.




Step 3: From the open end of the track, slide the round carrier wheels into the track. Once all the carriers are in the track, attach the track's end cap.



If you ordered a valance with your Averté™ Natural Fold, continue. Otherwise, the installation is complete.

Outside Mount with Valance

Step 4: Set the valance board on top of the now hanging brackets, all the way back, flush with the wall.

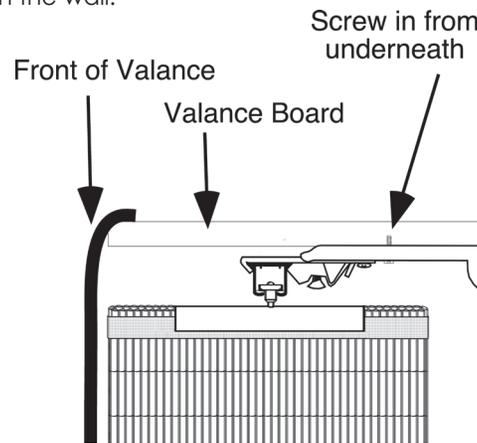

Step 5: Use a 5/8" self tapping screw at each bracket, up from underneath into the headboard of the valance.


Step 6: The valance returns attach to the ends of the valance board with velcro.

OM installation is now complete.

Deluxe Return Instructions

1. Lift the valance up.


2. Peel the liner strip off the double sided tape on the face of the return.




3. Pull the valance flat to align neatly with the return. Press the valance firmly against the return face to adhere the valance to the return. Repeat steps for opposite return.

Inside or Ceiling Mount and Valance


Step 1: If you ordered a valance with your folding door, it is installed first. Install the valance inside the window opening, and screw up through the board into the top of the window/soffit or ceiling. It is okay if the front of the valance projects out from the opening.

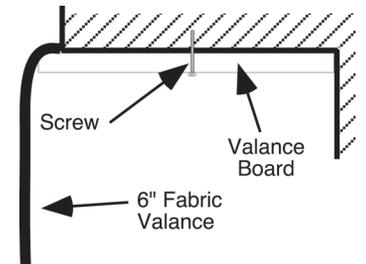

Step 2: Attach the IM brackets to the underside of the valance board. It should be positioned so that the rail will be in the center of the board. DO NOT tighten the screw all the way.



Step 3: From the open end of the track, slide the round carrier wheels into the track. Once all the carriers are in the track, attach the track's end cap.



Continue