

Upright™ Shades

IMPORTANT

In compliance with national safety regulations **shades will not operate unless the cord tensioner is installed correctly!** After the shade is installed, the cord tensioner must be secured to the wall.



1. Position the tensioner as close to the shade as possible without interfering with the shade.

2. The tension on the cord/chain should be loose enough to allow free movement, but tight enough not to allow a hazardous loop.

Warning

Young children can STRANGLE in cord and bead chain loops. They can also wrap cords around their necks and STRANGLE.



- Always keep cords and bead chains out of children's reach.
- Move cribs, playpens, and other furniture away from cords and bead chains. Children can climb furniture to get to cords.
- Do not tie cords together. Make sure cords do not twist together and create a loop.
- Attach tension device to wall or floor. This can prevent children from pulling cords and bead chains around their necks. Fasteners provided with the tension device may not be appropriate for all mounting surfaces. Use appropriate anchors for the mounting surface conditions.
- Do not remove looped cord from cord shroud.

Limited Lifetime Guarantee

Horizons Window Fashions warrants that its Horizons products - properly installed in a residential dwelling will be free from defects in materials and workmanship for as long as the original purchaser owns the product.

All fabric colors tend to lose their original intensity over time, and pull cords eventually wear out. This is considered normal wear and tear and is not covered by this guarantee. Abuse and misuse are not covered. Color lots vary and may not exactly match a previously ordered product. Repair is the purchaser's sole remedy under this guarantee.

This guarantee does not cover incidental or consequential damages, freight, installation or service calls (trip charges).

Horizons® Window Fashions
www.horizonshades.com

06/2016

Installation Instructions for



Shades of Elegance™ Roman Shades



Congratulations on
the purchase of your new Horizons™
Shades of Elegance Roman Shade!



New York Bracket Installation



Diagram A

1. Prepare the Headrail:

The headrail of your shade has been slotted for New York brackets before being wrapped with fabric. (Diagram A)

2. Install the Brackets:

Install the New York Brackets in the window to line up with the slits in the headrail. (Diagram B)




Diagram B

3. Put up the Shade:

Remove the wing nuts from the "New York" brackets and slide the shade into position by sliding the shafts of the brackets into the slots cut into the top of the headrail.

4. Secure the Shade:

While holding up the shade, reattach the wing nuts to the "New York" brackets and tighten.

Place the top middle lip of the headrail on the top lip of all brackets.

"L" Bracket Installation

"L" Brackets are an alternative outside mount bracket; not recommended for shades with a 6" classic valance. (Waterfall Only)

1. Install the Brackets:

Install the top of "L" bracket 3/4" down from where the top of the shade measurement was taken. (Diagram C) Make sure all the brackets are level. One bracket should be mounted 5" from each end of the shade. Intermediate brackets should be spaced evenly in between.





Diagram C


2. Secure the Shade:

Place the headrail on top of the mounted "L" brackets and then secure the shade to the brackets using the provided 3/4" screws.

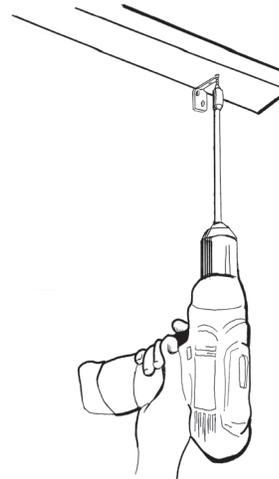


2" or 3" Screw Installation

2" or 3" screws are a quick and easy alternative inside mount installation method.

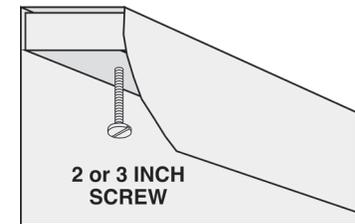

1. Insert the Mounting Screws:

With the shade down, insert the mounting screws from the bottom side of the headrail. One screw should be mounted 5" from each end of the shade. Intermediate screws should be spaced evenly in between. Use the correct number of screws.

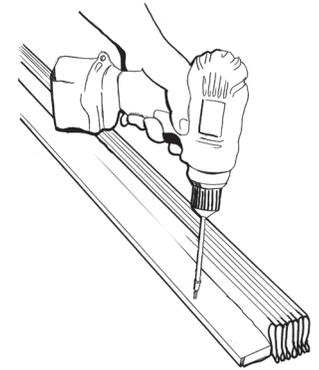

2. Position the Shade:

Hold the shades up and position it in the window opening. Drive the mounting screws up through the headrail into the inside of the window opening, soffit, or ceiling.

